



Typical Applications:

- Oil**
- LPG Powered Forklifts
- Motor Vehicles
- Sump capacity to 5 lt / 1.3 US gal
- Fuel**
- Petrol Engines
- 4WD's petrol and diesel

Physical Dimensions	Metric	US
Height	210mm	8.3"
Diameter	127mm	5"
Weight	3kg	6.6 lbs
Maximum Pressure	70 psi	
Rec. Operating Pressure	35 psi	



- The FMA filter includes 1 element. The housing is moulded in a glass-reinforced nylon and the base is cast aluminium, giving the best protection against corrosion.
- The FMA filter is produced with 2 x 1/4" BSPT female threads for inlet and outlets.
- A 1.5 mm restrictor is fitted when filtering engine oil.

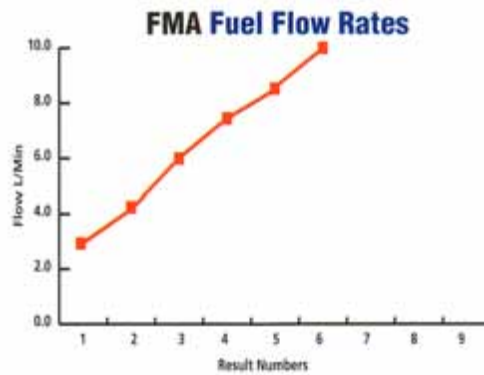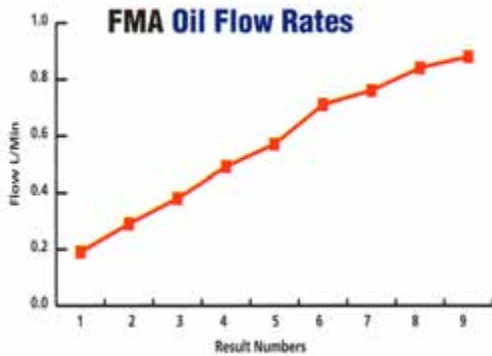

Flow Rates		Oil		Diesel	
Result Number	Line in pressure (psi)	Line out flow (L/min)	Line out flow (gals/hour)	Line out flow (L/min)	Line out flow (gals/hour)
1	20	0.19	2.53	3.00	39.90
2	30	0.29	3.86	4.20	55.86
3	40	0.38	5.05	6.00	79.80
4	50	0.49	6.52	7.50	99.75
5	60	0.57	7.58	8.50	113.05
6	70	0.71	9.44	10.00	133.00
7	80	0.76	10.11		
8	90	0.84	11.17		
9	100	0.88	11.70	72 psi final pump pressure obtained during test	