

WARNING: OILS AND FUELS MAY BE HARMFUL - ALWAYS WEAR EYE PROTECTION, GLOVES AND PROTECTIVE CLOTHING.

CAUTION: Filters, associated components and their contents may be hot.

WASTE OIL AND USED ELEMENTS SHOULD BE DISPOSED OF AS PER REGULATIONS

STEP 1

Place container under filter
Remove drain plug and drain filter



STEP 2

Undo Tee handle and remove element assembly
Place element assembly into clean container



STEP 3


Hold Tee handle in one hand and undo compression knob with other hand.

STEP 4

Remove elements and post seals.

STEP 5

Remove lid seals

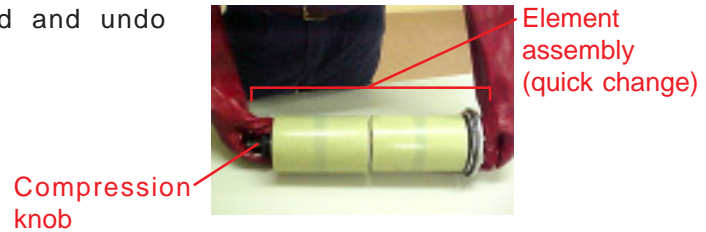

STEP 6


Remove centre tubes from elements.

NOTE: Oil elements have one center tube.

Fuel elements have two center tubes.

STEP 7

Clean all parts

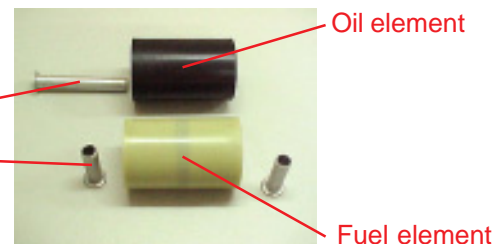

OIL ELEMENT part number FM0200

FUEL ELEMENT part number FM021F